

WL-21901 WL-21908 WL-21916

1U Rackmount 19" TFT LCD Keyboard Drawer



INTRODUCTION

The WL-21901, WL-21908, WL-21916 1U 19" TFT LCD keyboard drawer provides industrial level input solution to optimize your system in just 1U rack space. With features such as dual-rail design and built-in LCD OSD, it provides effective assistant for an administrator to control multiple servers.


FEATURES

- A Dual Rail for Independent Panel and Keyboard Tray
- B Support 17 Various Keyboard Languages
- C Bright Active Matrix TFT Display
- D OSD Function (On Screen Display) for LCD Display
- E Hidden Handle for Keyboard Tray
- F Durable Keyboards
- G Panel Protected by Tempered Glass
- H Optional Touch Screen LCD (*WL-21901 only)
- I Optional Audio Function (*WL-21901 only)
- J Optional DC Power



WL-21901 WL-21916 WL-21908

DRAWING

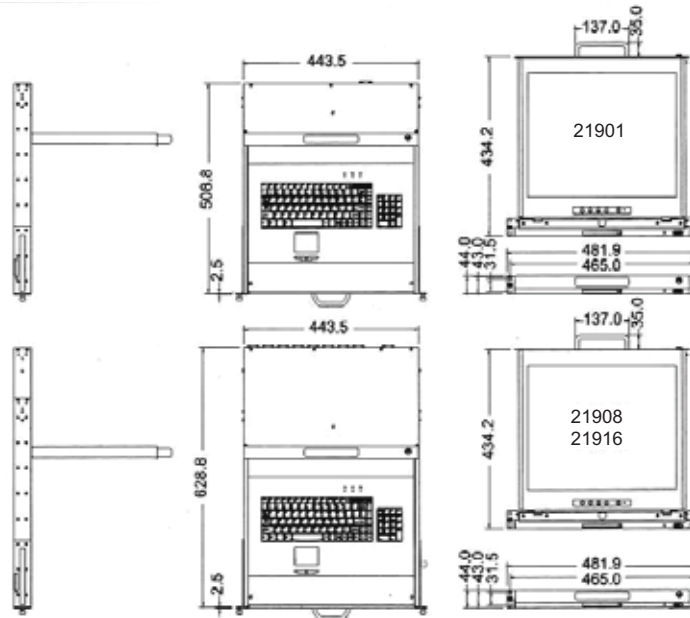

SPECIFICATIONS

Model Number	WL-21901	WL-21908	WL-21916
RoHS Compliance Version	Yes		
Dimensions [WxHxD]	19 x 1.7 x 20.1 inch	19 x 1.7 x 24.9 inch	19 x 1.7 x 24.9 inch
Net Weight	12.5 Kg / 27.6 lbs	14.0 Kg / 30.9 lbs	14.5 Kg / 32.0 lbs
Number of Ports	1	8	16
Display	19 inches		
Panel Type	Active Matrix TFT LCD		
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)		
Pixel Pitch	Supports 0.098mm x 0.294mm		
Viewing Angle	140° (H) / 140° (V)		
Contrast Ratio	500:1		
Brightness	White 250 cd/m2 (Center 1 point Typ)		
Back Light	Four Lamps for Back Light		
Supported Colors	16.2M Colors (6-bit with FRC)		
Response Time	Rising Time: 2ms, Decay Time: 10ms		
Keyboard Mouse	106 Key PS/2 Keyboard with Touch Pad		
Sync	45 ~ 80KHz		
Power Source	100~240 VAC Input		
Power Consumption	25W (21.05W for Panel)		
Temperature	Operate: 32° ~ 122°F, Storage: -4° ~ 140°F		
Humidity	10% ~ 90% RH		
Material of Main Chassis	Heavy Duty Steel		
Certification	CE/FCC/UL/CUL/C-Tick		

:: Specification and wiring diagram subject to change without notice
 :: Limited Life Time Warranty
 :: Last Update: Oct/2007

